_NETSelekt.pl

SLP-TX400


4 inch Thermal Transfer
Desktop Label Printer

Retail Warehouse Healthcare Post & Parcel

Smart and Premium





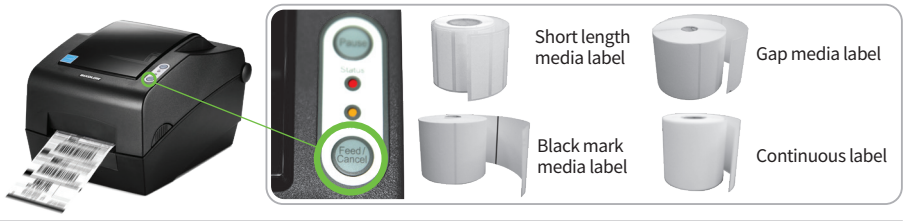

Enhanced RFID Convenience

- Embeded RFID + Ethernet + Auto Cutter (Optional)
- Extremely closely spaced RFID inlay is encoded and it reduces media waste and media replacement cycle
- Set up the configuration, write and read setting value by label unified utility

Premium-Level Performance

- Fully Compatible with Market-Leading Programming Languages
- Fast Data Processing and Printing Speed up to 7 ips (178 mm/sec)
- Smart Media Detection™ : Automatic paper detection
- Fast data processing speed of various types of label

User-Friendly Design

- All in one Plus™ Interface
  Standard : USB + Serial + Parallel
  Optional : USB + Ethernet + Serial + WLAN
- Wide range of ribbon roll length from 74m to 300m
- Easy paper loading with adjustable paper guide
- Pause and cancel function-keys

Made for iPod iPhone iPad

All-in-one

ENERGY STAR

BIXOLON®
a Better Solution for your Business™

SLP-TX400

4 inch Thermal Transfer
Desktop Label Printer

Specifications

Printer Specifications

Print Method
Thermal Transfer, Direct Thermal

Print Speed
SLP-TX400: Up to 7 ips (178 mm/sec)
SLP-TX403: Up to 5 ips (127 mm/sec)

Print Resolution
SLP-TX400: 203 dpi
SLP-TX403: 300 dpi

Print Width
SLP-TX400: Up to 108 mm
SLP-TX403: Up to 105.7 mm

Print Length
Up to 1,000 mm

Sensor
Transmissive, Reflective (Adjustable),
Ribbon-End, Head open

Media Characteristics

Media Type
Gap, Black Mark, Notch, Continuous, Fan-Fold

Media Width
25 ~ 112 mm

Media Roll Diameter
Up to 130 mm

Media Thickness
0.06 ~ 0.20 mm

Supply Method
Easy Paper Loading

Inner Core
25.4 ~ 38.1mm

Ribbon Characteristics

Ribbon Type
Wax, Wax/Resin, Resin, Outside

Ribbon Width
33 ~ 110 mm

Ribbon Length
Up to 300 m

Core Inner Diameter
25.4 mm, 12.5 mm

Physical Characteristics

Dimensions (WxDxH)
214 x 310 x 195 mm
(8.42 x 12.20 x 7.67 inch)

Weight
2.85 kg (6.28 lbs.)

Electrical
EnergyStar Certified,
External Power Adaptor 100-240V AC, 50/60Hz

Performance Characteristics

Memory
64 MB SDRAM, 128 MB Flash

Interface
Standard: USB + Serial + Parallel
Optional: ① USB + Serial + Ethernet + WLAN[1]
② USB + Serial + Ethernet + Bluetooth[2]
SLP-TX400R(RFID)
USB + Serial + Ethernet + Bluetooth[2] / WLAN[1]
+ RFID

WLAN[1]: 802.11a/b/g/n/ac USB dongle type (Optional)
Bluetooth[2]: USB dongle type (Optional)

Real Time Clock
Supported

Environment Characteristics

Temperature
Operating: 5 ~ 40°C (41 ~ 104°F)
Storage: -20 ~ 60°C (-4 ~ 140°F)

Humidity
Operating: 10 ~ 80% RH
Storage: 10 ~ 90% RH

Software

Emulation
SLCS™, BPL-Z™, BPL-E™

Driver / Utility
Windows Driver (Europlus / Seagull),
Linux / Mac CUPS Driver,
Virtual COM USB / Ethernet Driver,
Utility Program, OPOS / JPOS Driver,
Bartender Ultralite for BIXOLON, Label Artist-II™,
SAP® Device Driver

SDK / Plugin
Android / iOS / Windows SDK, Linux SDK,
Chrome SDK, Xamarin SDK

Application
Label Artist™ Mobile (Android, iOS),
mPrint App (iOS), mPrint Server (Windows, iOS)

MDM
BIXOLON Profile Manager
- XPM™, XCM™ (Windows, Android)

Fonts / Graphics / Symbologies

Fonts
- 10 SLCS Resident Bitmap Fonts
- One SLCS Resident Scalable Font
- 16 BPL-Z™ Resident Bitmap Fonts
- One BPL-Z™ Resident Scalable Font
- 5 BPL-E™ Resident Bitmap Fonts
- 23 Code Page
- Unicode supported
  (UTF-8, UTF-16LE, UTF-16BE)

Graphics
Supporting user-defined fonts, graphics,
formats, and logos

Barcode Symbologies
1D: Codabar, Code 11, Code 39, Code 93,
Code 128, EAN-13, EAN-8, Industrial 2-of-5,
Interleaved 2-of-5, Logmars, MSI, Plessey,
Postnet, GS1 DataBar (RSS-14),
Standard 2-of-5, UPC / EAN extensions,
UPC-A, UPC-E, IMB
2D: Aztec, Codablock, Code 49, Data Matrix,
MaxiCode, MicroPDF417, PDF417, QR code,
TLC 39

Accessories

Options
RFID, Peeler, Auto Cutter, External Paper Supply,
WLAN Dongle(Consensus required)

RFID

Frequency
UHF, 865 ~ 868MHz(EU),
902 ~ 928MHz(KR, USA, CHN)

Transmit Power
1W

Modulation
ASK

Protocol
UHF EPC Class 1 Gen 2 V1.2/ ISO 18000-6C

Auto Cutter
Optional

Tag Pitch
Min 25mm

BR_SLP-TX400_EN_FEB20_V1

Copyright © BIXOLON Co., Ltd. All rights reserved. Features and specifications are subject to change without prior notice.

BIXOLON

BIXOLON Co.,Ltd.
+82 (0) 31 218 5500
sales@bixolon.com

BIXOLON America Inc.
+1 858 764 4580
sales@bixolonusa.com

BIXOLON Europe GmbH
+49 211 68 78 54 0
sales@bixolon.de

www.Bixolon.com