CITIZEN _NETSelekt.pl

Well protected

Front paper exit perfect for hospitality

MOBILE POS READY



CT-S651II
(Also available with a white case)

Greyscale Printing
Print up to 16 shades of grey to create clear yet subtle company logos on receipts and feint watermarks behind text.

SpillSheild™ design
Front exit and curved top case helps stop drinks and other liquids dripping inside the printer mechanism.

Tool-free maintenance
The self-retracting cutter clears paper jams automatically. But should the long-life cutter need to be replaced, no tools are needed and it takes just 30 seconds to clip-in a new one

Internal Power Supply
The CT-S651II offers an internal power supply as standard or powered USB options.

CITIZEN CT-S651II

POS

Applications

- Hospitality
- Receipts
- Kitchen Orders
- Restaurants and Bars
- Coupons
- Kiosks
- Ticketing



Front paper exit



Clip-in cutter

Hi end models of the CT-S800er series with top exit and LCD panel models also available



Otto-Hirsch-Brücken 17 • D-70329 Stuttgart Germany • Tel.: +49 (0)711 49032-0 • Fax: +49 (0)711 49032-45 • www.citizen-systems.com

CITIZEN SYSTEMS EUROPE GMBH

CITIZEN

Interface Options

- USB
- Serial RS232
- Ethernet LAN
- Wireless LAN
- Bluetooth® (MFi)
- Powered USB
- USB with Hub
- Parallel




Exchangeable interfaces plus cash drawer kick-out

Specifications


Model		CT-S651II
Printing method		Line thermal dot printing
Printing width		Max 80 mm: 80, 72, 68, 64, 54, 52, 48, 45mm selectable Max 640 dots: 640 to 360 dots
Dot pitch		8 x 8 dots/mm (203 dpi)
Printing speed		220 mm / second maximum (at 100% print darkness)
Number of columns		82.5mm paper: Font A=53, font B=71 & font C=80 columns 80mm paper: 48, 64 & 72 58mm paper: 35, 46 & 52
Character size		Font A: 1.50 x 3.00mm (12 x 24 dots), Font B: 1.13 x 2.13mm (9 x 17 dots), Font C: 1.00 x 2.00mm (8 x 16 dots)
Character table		Alphanumeric, international, PC437, 850, 852, 857, 858, 860, 863, 864, 865, 866, WPC1252, katakana, Thai code 18
Barcode type		UPC-A/E, JAN-13/8, Code 39, Code 128, CODABAR, Code 93, PDF417, QR Code
Logo registration/print		384 KB (capable of storing user-defined characters and logos)
Line spacing		4.23mm (1/6 inch), can be set by command
Paper	Width	82.5mm / 80mm / 60mm / 58mm (all +0/-1mm)
	Roll size	Maximum 83mm diameter
	Thickness	65-75 µm (core OD 18mm) 75-150 µm (core OD 32mm)
	Recommended Paper	TF-50KS-E-2D from Nippon Paper, PD150R or PD160R from Ohji Paper, PA220AG, HP220A, HP220AB-1, F230AA, P220AB, or PB670 (2-color paper) from Mitsubishi Paper
Interface options		Serial, parallel (IEEE 1284), USB, USB with hub, Ethernet, Wireless LAN (Wifi), powered USB, Bluetooth®
Input buffer		4K bytes/45 bytes
Drawer kick-out		2 drawers
Operation panel		3 LEDs (Power, Paper, Error) and Feed key
Power supply		With AC adapter: 110 to 240 VAC, 50/60Hz. 3W in standby mode Output (or DC variant): 24VDC, 2.1A
Weight		2.0 kg with internal AC adapter. 1.6 kg for DC version
Dimensions (W x D x H)		145 (W) x 192 (D) mm. 148mm high with AC adapter. 120mm high DC version
Operating environment		5 to 45°C, 10 to 90% RH (no condensation)
Storage environment		-20 to 60°C, 10 to 90% RH (no condensation)
Reliability		Print head: 150 Km or 200 million pulses. Cutter: 2 million cuts (With recommended papers and environmental conditions)
EMC and safety standards		UL, C-UL, FCC Class A, TUV-Bauart, CE Marking, VCCI, CCC, BIS
Warranty		2 years for printer and print head subject to normal usage conditions

All product names are trademarks of the respective manufacturers. Epson® and ESC/POS™® are trademarks or registered trademarks of Seiko Epson Corporation. Bluetooth® is a registered trademark of the Bluetooth SIG and WiFi is the registered trademark of the Wi-Fi Alliance Designs, specifications and availability are subject to change without notice. Errors and omissions excluded.

Customization Software

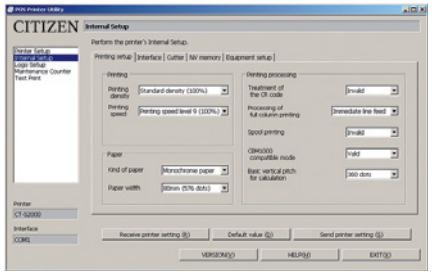



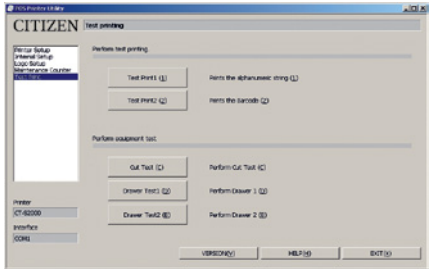

CITIZEN CT-S651II

POS

Paper Roll 82.5 mm | Paper Roll 80 mm | Paper Roll 60 mm | Paper Roll 58 mm

Features & Benefits

- 220mm/sec high-speed printing
- 82.5, 80, 60 & 58 mm paper widths
- Easy, drop-in paper loading
- Auto retracting full & partial cutter
- Front paper exit
- Grayscale printing: 16 shades
- Tool-free cutter servicing
- Built-in buzzer
- Paper roll capacity Ø 83mm
- Exchangeable interface cards
- Built-in AC adaptor or DC & powered USB models
- Cash drawer kick-out
- Logo and font download and storage
- 1D and 2D internal barcodes
- ESC/POS™® compatibility
- Available in black or white
- Drivers, Layout Utilities and SDKs for Windows, Linux, macOS, Android, iOS, JavaPOS, OPOS and more

Otto-Hirsch-Brücken 17 • D-70329 Stuttgart Germany • Tel.: +49 (0)711 49032-0 • Fax: +49 (0)711 49032-45 • www.citizen-systems.com

CITIZEN SYSTEMS EUROPE GMBH