
_NETSelekt.pl

SPP-R210

2 inch Mobile Printer

Ticketing | Customer service | Food Deliveries | Retail

The Industry's **Smallest and Lightest**

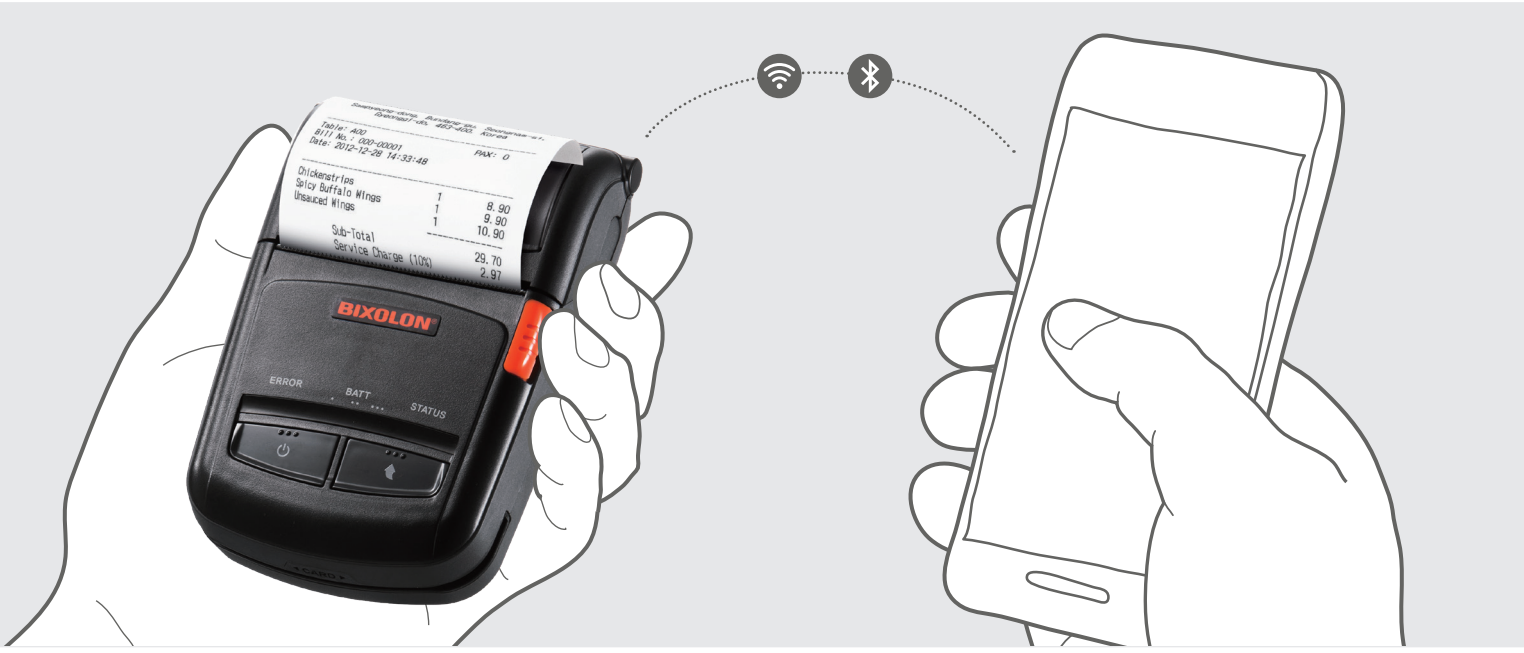



Seamless Mobility

- Ideal for using smart devices including iPhone, iPad, and Android
- Versatile connectivity supported (802.11 b/g/n and more)
- 232g (0.51 lbs.) light weight, 20% slimmer and 25% smaller than SPP-R200II



Field-work Optimization

- IP54 rated rugged design (with protective case)
- 1.2 m drop resistant
- Optional integrated card reader (MSR or MSR + SCR)
- Long-lasting battery life



Outstanding Performance

- Fast printing speed up to 90 mm/sec (Receipt)
- Linerless label printing (Optional)
- Low-temp (-15°C) printing

Made for iPod iPhone iPad

BIXOLON
a Better Solution for your Business™

SPP-R210

2 inch Mobile Printer

8X Nº1 MOBILE RECEIPT PRINTER MANUFACTURER



Reported by Chunichisha

Specifications

Print Specifications

Print Method
Direct Thermal

Print Speed
Up to 90 mm/sec (Receipt)
Up to 60 mm/sec (Linerless)
12.5% pattern

Print Resolution
203 dpi

Print Width
Up to 48 mm

Sensor
Paper End
Paper Cover Open

Media Characteristics

Media Type
Receipt, Linerless (Optional)

Media Width
58 mm

Media Roll Diameter
Up to 30 mm

Media Thickness
0.07 ± 0.005 mm

Supply Method
Easy Paper Loading

Physical Characteristics

Dimensions (WxDxH)
79 x 116 x 36.5 mm
(3.11 x 4.57 x 1.44 inch)

Weight
Including MSR + battery: 232 g (0.51 lbs.)

Electrical
7.4 V Li-ion, 1200 mAh,
Rechargeable Charging time: Up to 2.5 hrs

Performance Characteristics

Memory
8 MB SDRAM, 4 MB Flash

Interface
Standard: USB V2.0 FS
Optional: USB V2.0 FS + Bluetooth / WLAN

Bluetooth : V3.0+EDR
WLAN: 802.11b/g/n (Infrastructure, Ad-hoc, Wi-Fi Direct)
- WEP40/104, WPA1/2 (PSK, EAP)

Environment Characteristics

Temperature
Operating: -15 ~ 50°C (5 ~ 122°F)
Storage: -30 ~ 70°C (-22 ~ 158°F)

Humidity
Operating: 10 ~ 80% RH

Sealing
IP54 (with protective case)

Drop Rate
1.2 m (4 ft.)

Software

Emulation
BXL / POS

Driver / Utility
Windows Driver, OPOS / JPOS Driver, Linux / Mac CUPS Driver, Utility Program, Network Auto Installer

SDK / Plugin
Android / iOS / Windows SDK, Linux SDK, Xamarin SDK, Chrome SDK, Cordova Plugin

Browser / App
mPrint App (iOS)

Fonts / Graphics / Symbologies

Character Size
Font A: 12 x 24 Font B: 9 x 17 Font C: 9 x 24

Characters Per Line
Font A: 32 Font B, C: 42
KOR, CHN, JPN: 16

Character Sets
Alphanumeric: 95
Expanded Graphics: 128 x 33 page
International: 32
Optional Unicode supported (UTF-8, UTF-16LE, UTF-16BE)

Graphics
Supporting user-defined fonts, graphics, formats, layouts, and logos

Barcode Symbologies
1D: Codabar, Code 39, Code 93, Code 128, EAN-8, EAN-13, ITF, UPC-A, UPC-E
2D: Aztec, Data Matrix, MaxiCode, PDF417, QR code

Accessories

Standard
Belt Clip, Battery Pack, Battery Charger, Power Cord

Optional
Belt Strap, Battery Pack_V2 (with outer contacts), Single Battery Cradle, Single Docking Cradle, Quad Battery Charger, Quad Docking Cradle, Wall Mount (for Quad Battery Charger), Vehicle Charger, Vehicle Holder, USB Cable, Case, Protective Case

Integrated Card Reader (Optional)

MSR
3 Track (T-DES / DUKPT (Optional))

BR_SPP-R210_EN_NOV21_V1

Copyright © BIXOLON Co., Ltd. All rights reserved. Features and specifications are subject to change without prior notice.

BIXOLON
www.BIXOLON.com

BIXOLON Co.,Ltd.
+82 31 218 5500
sales@bixolon.com

BIXOLON America Inc.
+1 858 764 4580
sales@bixolonusa.com

BIXOLON Europe GmbH
+49 211 68 78 54 0
sales@bixolon.de

BIXOLON MEA
+971 4 222 6480
russell@bixolon.com