Smart Mobile Terminal

SUNMI V3 MIX

MIX, the all-in-one enterprise tablet.

_NETSelekt.pl

Powered by SUNMI OS

Compatible with SUNMI DMP



MIX your POS terminal to capture businesses anywhere, anytime.

10"high-resolution display and a built-in high speed printer make a mobile and desktop terminal.

MIX, design not only for payment.

Ergonomically designed for a comfortable grip. Professional scan ner integrated 1D/2D barcode scanning. Aluminum-magnesium alloy fr ame and incell touchscreen make it strong yet slim and light.
*All Pictures shown are for illustration purpose only, actual p roduct may vary.



MIX for higher performance.

Qualcomm hexa-core processor and 4GB RAM+32GB ROM for an assured strong performance.

MIX for wider extensibility.




Specially designed rotatable functional cradle enable cash drawer, handheld scanner and network among other accessories that boost your business.
*Both rotatable cradle and non-rotatable cradle options are available.


Built-in high speed thermal printer



Professional scanner integrated 1D/2D barcode scanning supported.

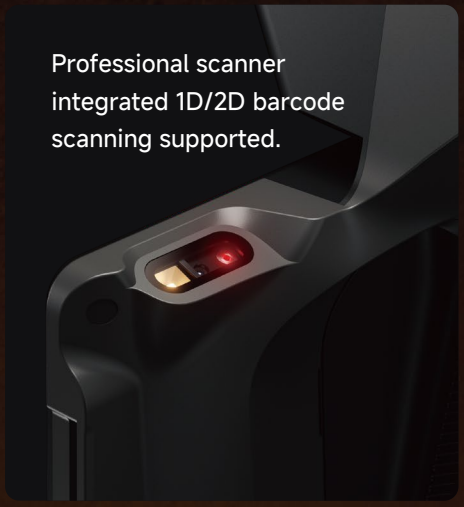


NFC reader

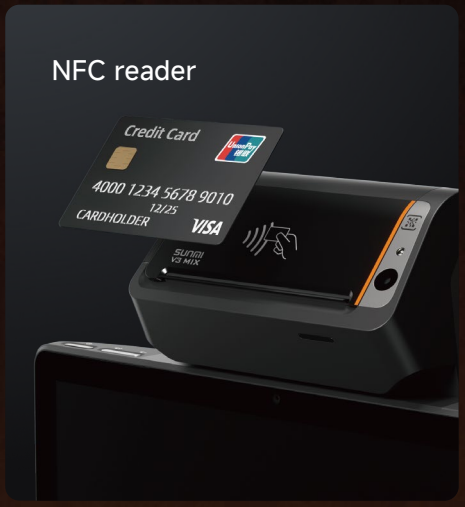


SUNMI V3 MIX Application Scenario




Tableside Ordering

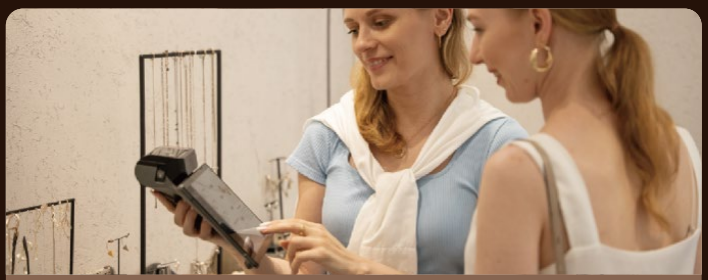

One-on-one Service

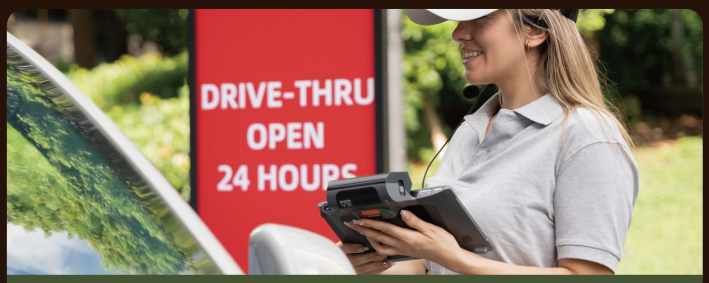

Drive Thru

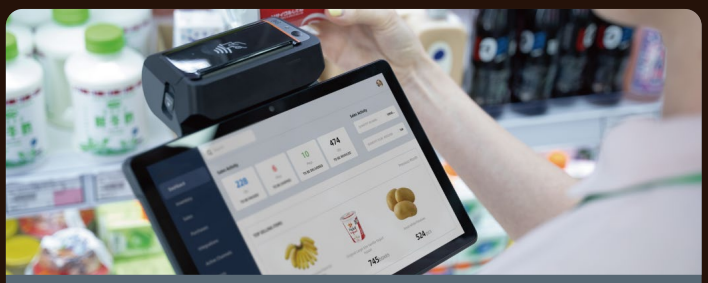

Inventory Check

SUNMI V3 MIX Tech Specs

General Configuration

Product Model T5701 58mm version T5711 80mm version	**OS** SUNMI OS 4.0 (based on Android 13)	**Processor** Qualcomm hexa-core 2.4/2.0GHz	**Memory** 4GB RAM+32GB ROM	**Display** 10.1'' HD 1280*800 IPS
Battery Removable Lithium battery 7.2V/2600mAh	**Camera** Front 2MP FF QR Payment 0.3MP FF	**Scanner** 2D professional scanner	**Wi-Fi** Supports IEEE 802.11 a/b /g/n/ac 2.4G/5G	**Speaker** 1.2W
Bluetooth BT2.1/3.0/4.2, supports BLE	**Button** Power Key, Volume Key and Scan Key	**GPS** GPS, AGPS	**NFC Reader** Type A&B card Mifare card, FeLica card ISO/IEC 14443 and ISO 15693 compliant	**PSAM Card Slot** PSAM Card slot, complies with ISO7816 standard, 1.8V/3.0V
SIM Card Slot Dual Nano SIM Card slot, Support 1.8V/3.0V	**SD Card Slot** MicroSD *1	**Fingerprint** Only for login (Optional)	**Power Adapter** Input: AC100-240V, Output: 5V/2A	**Dimensions (L*W*H)** 246*231*73mm
Weight 670g(58mm)/710g(80mm)	**Cradle (Optional)** For charging, 3*USB Type A, RJ11, RJ45	**Cradle Customer Display (Optional)** USB 6.7" touchscreen	**Environment** Operating temperature: 0°C~45°C (except 3D camera) Storage temperature: -20°C~60°C	

	58mm version	80mm version
Printer	Thermal Printer, Print speed: 70mm/s Paper Roll Width / Diameter: 58mm/ 40mm	Thermal Printer, Print speed: 70mm/s Paper Roll Width / Diameter: 80mm/ 40mm

1.All specifications are subject to change without (prior) notice.