_NETSelekt.pl

XD3-40 Series

4-inch Desktop Label Printers

Retail Warehouse Healthcare Logistics


Durable and Cost-Effective





Basic Functions

- Supporting Direct Thermal(XD3-40d) and Thermal Transfer(XD3-40t) label printing
- Printing speeds of up to 5ips (127mm/sec)
- Fully compatible with market-leading programming languages
- Simple to set up through a single LED
- Smart switch programming languages without setting the mode

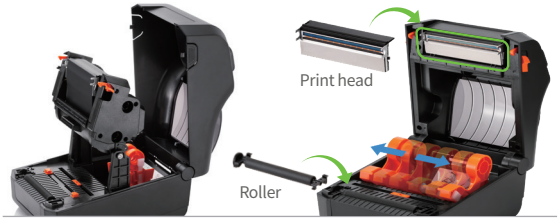

User-Friendly Design

- Easy paper loading with adjustable paper guide and holder
- Easy set up media sensor
- Optional peeler and external paper supply
- Toolless maintenance of roller and print head
- Suitable for both 1/2-inch and 1-inch core ribbon (74 m and 300 m)



Connectivity Options

- Standard: USB
- Optional: USB + Serial + Ethernet

BIXOLON
a Better Solution for your Business™

XD3-40 Series

4-inch Desktop Label Printers

Specifications

Printer Specifications

Print Method
XD3-40d: Direct Thermal
XD3-40t: Thermal Transfer or Direct Thermal

Print Speed
Up to 5 ips (127 mm/sec)

Print Resolution
203 dpi

Print Width
Up to 104 mm

Print Length
Up to 1,000 mm

Sensor
Transmissive(Fixed), Reflective(Adjustable), Head Open, Ribbon-End (XD3-40t only)

Media Characteristics

Media Type
Gap, Black Mark, Notch, Continuous, Fan-Fold

Media Width
15 ~ 118 mm

Media Roll Diameter
Up to 127 mm

Media Thickness
0.06 ~ 0.20 mm

Supply Method
Easy Paper Loading

Inner Core
25.4 ~ 38.1mm

Ribbon Characteristics

Ribbon Type
Wax, Wax / Resin, Resin, Outside

Ribbon Width
33 ~ 110mm

Ribbon Length
Up to 300m

Core Inner Diameter
25.4 mm, 12.7 mm

Physical Characteristics

Dimensions (WxDxH)
XD3-40d: 181 x 222 x 168 mm
(7.13 x 8.74 x 6.62 inch)
XD3-40t: 210 x 284 x 186 mm
(8.3 x 11.2 x 7.3 inch)

Weight
XD3-40d: 1.7kg (3.75 lbs.)
XD3-40t: 2.6kg (5.73 lbs.)

Electrical
EnergyStar Certified,
External Power Adaptor 100-240V AC, 50/60Hz

Performance Characteristics

Memory
64 MB SDRAM, 128 MB Flash

Interface
Standard: USB
Optional: USB + Serial + Ethernet

Real Time Clock
Not Supported

Environment Characteristics

Temperature
Operating: XD3-40d: 0 ~ 40°C (32 ~ 104°F)
XD3-40t: 5 ~ 40°C (41 ~ 104°F)
Storage: -20 ~ 60°C (-4 ~ 140°F)

Humidity
Operating: 10 ~ 80% RH
Storage 10 ~ 90% RH

Software

Emulation
SLCS™, BPL-Z™, BPL-E™, BPL-D™ (Optional)

Driver / Utility
Windows Driver (Europlus / Seagull)
Linux / Mac CUPS Driver
Virtual COM USB / Ethernet Driver,
Utility Program, OPOS Driver
Bartender Ultralite for BIXOLON
Label Artist-II™

SDK / Plugin
Windows SDK, Linux SDK

Fonts / Graphics / Symbologies

Fonts
Bitmap Fonts (10 SLCS™, 16 BPL-Z™, 5 BPL-E™, 9 BPL-D™), Scalable Fonts (1 SLCS™, 1 BPL-Z™, 1 BPL-D™), 23 Code page, Unicode supported (UTF-8, UTF-16LE, UTF-16BE)

Graphics
Supporting user-defined fonts, graphics, formats and logos

Barcode Symbologies
1D: Codabar, Code 11, Code 39, Code 93, Code 128, EAN-13, EAN-8, Industrial 2-of-5, Interleaved 2-of-5, Logmars, MSI, Plessey, Postnet, GS1 DataBar (RSS-14), Standard 2-of-5, UPC/EAN extensions, UPC-A, UPC-E, IMB
2D: Aztec, Codablock, Code49, Data Matrix, MaxiCode, MicroPDF417, PDF417, QR Code, TLC39

Accessories

Standard
Cable-USB

Optional
Peeler,External Paper Supply, Serial cable

Supplies

B-ribbon™, B-band™



Copyright © BIXOLON Co., Ltd. All rights reserved. Features and specifications are subject to change without prior notice.

BIXOLON
www.BIXOLON.com

BIXOLON Co.,Ltd.
+82 31 218 5500
sales@bixolon.com

BIXOLON America Inc.
+1 858 764 4580
sales@bixolonusa.com

BIXOLON Europe GmbH
+49 211 68 78 54 0
sales@bixolon.de

BIXOLON MEA
+971 4 222 6480
russell@bixolon.com